


# Kickstand Tool • KS-1

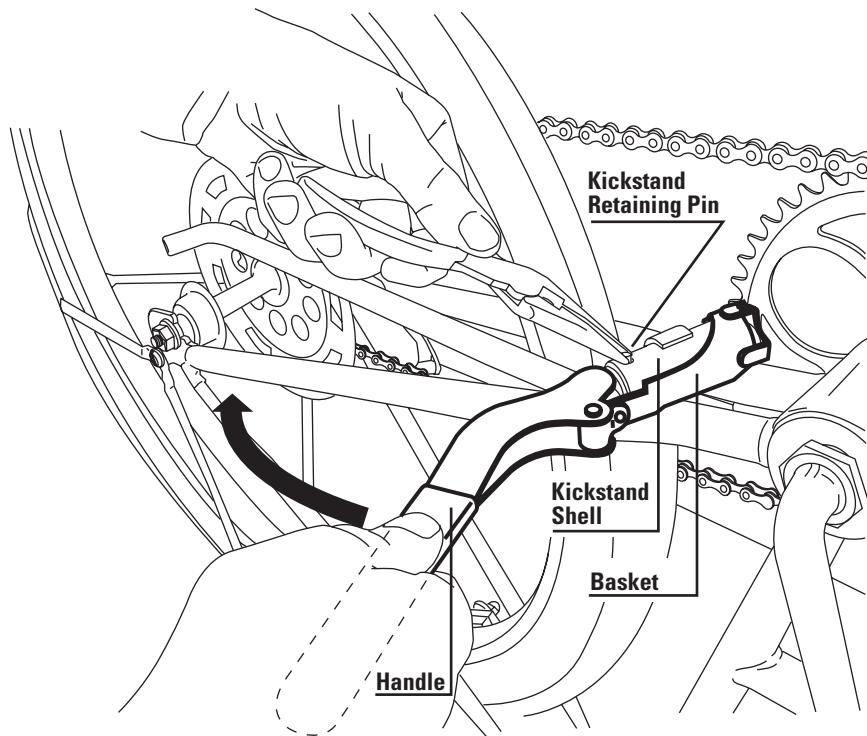

The Park Tool KS-1 Kickstand Tool is designed for easy removal and installation of built-in, spring-loaded kickstands (also called "Sprague" or "Schwinn-type" kickstands).

## INSTRUCTIONS FOR USE

### Kickstand Removal

1. Place basket of KS-1 over frame's kickstand shell, as pictured.
2. Pull handle to compress spring inside shell.
3. With spring compressed, remove retaining pin.
4. Remove kickstand and inspect parts.

### Kickstand Installation

1. Insert kickstand parts into frame's kickstand shell.
2. Place basket of KS-1 over shell, as pictured.
3. Pull handle to compress spring just far enough to insert retaining pin.
4. Release pressure from handle. Retaining pin will hold kickstand in place.



PARK TOOL CO.  
6 Long Lake Rd  
St. Paul, MN 55115  
[www.parktool.com](http://www.parktool.com)

